

**B. Tech. Sem -VI (E & TC Engg.) (2014 COURSE) (CBCS) :  
SUMMER - 2019**

**SUBJECT: INFORMATIN THEORY & CODING**

Day: Friday  
Date: 31/05/2019

S-2019-2781

Time: 02.30 PM TO 05.30 PM  
Max. Marks: 60

**N.B.:**

- 1) All questions are **COMPULSORY**.
- 2) Figures to the right indicate **FULL** marks.

**Q.1** State and explain all property of entropy? Also explain information rate? (10)

**OR**

**Q.1** Apply Shannon fano coding for the following? (10)

$$P(x) = [0.45, 0.15, 0.1, 0.1, 0.08, 0.08, 0.04]$$

Determine entropy of source find coding efficacy?


**Q.2** A describe source transmits messages  $x_1, x_2, x_3$  with probability  $P(x_1)=0.35,$  (10)  
 $P(x_2)=0.25, P(x_3)=0.40$  with probability matrix is-

$$P(Y/X) = \begin{matrix} & \begin{matrix} y_1 & y_2 & y_3 \end{matrix} \\ \begin{matrix} x_1 \\ x_2 \\ x_3 \end{matrix} & \begin{bmatrix} 0.9 & 0.1 & 0 \\ 0 & 0.8 & 0.2 \\ 0 & 0.3 & 0.7 \end{bmatrix} \end{matrix}$$

Cal all the entropy and mutual information with channel?

**OR**

**Q.2** Find mutual information for channel? (10)

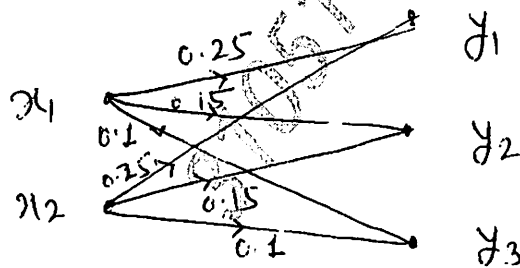

**Q.3** Derive expression for channel capacity of binary channel whose channel (10)

matrix is given by: 
$$P(Y/X) = \begin{bmatrix} (1-p) & p & 0 \\ 0 & p & (1-p) \end{bmatrix}$$

Also draw channel diagram?

**OR**

**Q.3** A Gaussian channel has 5MHz band width cal. Channel capacity if SNR  $10^5$  Hz (10)  
also find maximum information rate?

**P. T. O.**

Q.4 Consider (7,4) linear block code whose matrix: (10)

$$G = \begin{bmatrix} 1 & 0 & 0 & 0 & 1 & 0 & 1 \\ 0 & 1 & 0 & 0 & 1 & 1 & 1 \\ 0 & 0 & 1 & 0 & 1 & 1 & 0 \\ 0 & 0 & 0 & 1 & 0 & 1 & 1 \end{bmatrix}$$

- 1) All code vectors?
- 2) Parity check matrix?
- 3) Error correcting and detecting.
- 4) Syndrome vector.

OR

Q.4 A parity check matrix : (10)

$$H = \begin{bmatrix} 1 & 0 & 1 & 1 & 0 & 0 \\ 1 & 1 & 0 & 0 & 1 & 0 \\ 0 & 1 & 1 & 0 & 0 & 1 \end{bmatrix}$$

- 1) All code vectors?
- 2) Parity check matrix?
- 3) Decode code word (110111) and (111011)

Q.5 Construct an encoder and syndrome calculator for (7,4) cyclic code generated by  $g(x) = X^3 + X + 1$  and verify its operation using message vector (1001) also determine syndrome vector for error is (0000100) (10)

OR

Q.5 Find G matrix and code polynomial for RS-code using  $GF(2^3)$  for polynomial  $= X^3 + X^2 + 1$ . With message vector (100, 111, 110) (10)

Q.6 Write short note on (10)  
1) Viterbi algorithm.  
2) Turbo codes.

OR

Q.6 A convolution encoder  $r = 1/3$  (10)  
 $g_1 = [101]$ ,  $g_2 = [010]$ ,  $g_3 = [111]$   
1) draw code tree  
2) state diagram  
3) trellis diagram if message is =10111.

\* \* \* \*